



**SPECIFICATIONS**

- Submersible up to 328 ft / 100 mtr (IEC 60529)
- Corrosion Resistant Salt Spray Tested (ASTM B117)
- Heavy Duty Stainless Steel Type 316 mount feet
- Single piece Silicon Sealing O-Ring
- Stainless Steel 316 Fasteners & Hardware
- Internal fastening locations for optional Back Plate accessory
- High Impact & Crush Resistance (IK10)

**MATERIAL**

Marine Grade 5083 Aluminum\*

**FINISH**

Natural Finish\*

\*Alternative color options available on request

**OPTIONAL ACCESSORIES**

- Standard Internal Mount/Back Plates
- Hinged Lid
- Optical Window Lid
- Lock Tab
- Captive Lid Fasteners
- Internal Swing out Panel
- Stainless Steel Type 316 Cable Glands / Cord grips
- Shock & Vibration Isolation Mount Kits

**CODE**



- B
- H
- O
- L
- C
- S

**INDUSTRY STANDARDS**

NEMA Type 6, 6P  
IP67/68 IEC 60529  
IK10 Impact Resistant

**APPLICATION**


The SUBSEA range of Aluminum Submersible Enclosures are the leaders in underwater system protection. Used by renewable energy, Submarine and ROV companies requiring ultimate protection against extreme marine conditions. Manufactured from marine grade Aluminum with corrosion resistant Stainless Steel type 316 hardware and a single piece Silicon O-ring that provides watertight protection of your vital electrical equipment whilst still allowing acoustic and wireless signal transmission. SLAYSON's SUBSEA range of enclosures and accessories deliver a reliable enclosure system to meet both the operational and environmental demands for any underwater application.

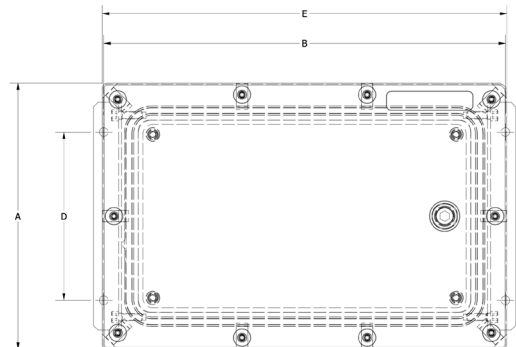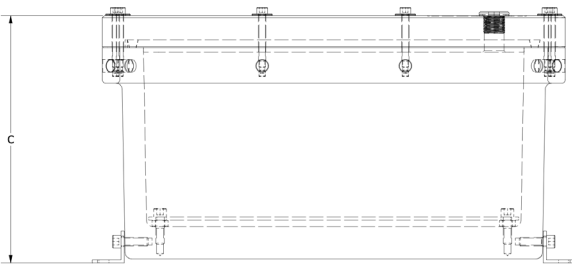

**MODIFICATION AND CUSTOMIZATION**

SLAYSON excels at modifying and personalizing all our Enclosure products to meet your exact specifications. Whether you require cutouts, welded in-place bosses or a non-standard size. Contact our experienced Engineers about your project specific solution.

**PART NUMBER BUILDER**

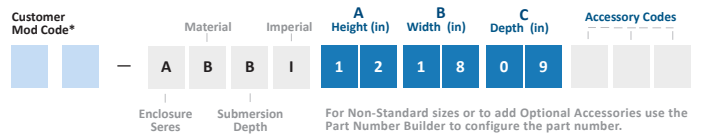

\*Generated by SLAYSON Engineering for customer specific modifications

PART NUMBER	A		B		C		D		E		F	
	External Height		External Width		External Depth		Internal Height		Internal Width		Internal Depth	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
<b>ABBI121809</b>	<b>12</b>	306.0	<b>18</b>	456.0	<b>9</b>	227.0	<b>14.3</b>	364.0	<b>7.3</b>	185.0	<b>3.6</b>	92.0